



Warmup® Insulated Underlay is a thin polystyrene insulation barrier with effective acoustic properties to reduce contact noise.

It sits between the cold subfloor and foil heater reflecting heat upwards, making the underfloor heating system more efficient and effective. The foil backing acts as an effective moisture barrier.

Technical Data

Size	Width – 1200mm Coverage/Pack – 2.5sqm, 5.0sqm, 10sqm, 25sqm
Thickness	6mm
Composition	Top Layer: Grooved polystyrene Bottom layer: Silver foil with adhesive overlap
Rm value	0.19 m ² K/W
Contact Sound Reduction.*	25dB ΔLw when used in conjunction with Warmup® Dual Overlay

* In case of floating substrate systems the sound reduction of the finished floor covering will always depend on the impact sound reduction of the existing substrate.

Feature:


- Resists heat loss and increases the efficiency of the underfloor heating system
- Extremely effective in reducing contact noise
- Very thin at only 6mm in depth
- Lightweight and easy to install
- Foil backing acts as a moisture barrier
- Recommended for use in combination with Warmup® Dual Overlay when installing resilient floor coverings

Price: 2.5sqm pack - £24.98 + VAT
5.0sqm pack - £47.49 + VAT
10sqm pack - £91.66 + VAT
25sqm pack - £216.66 + VAT

Code: WIU2.5
Code: WIU5.0
Code: WIU10.0
Code: WIU25.0


Floor Cutaway

Floating Wood/Laminate

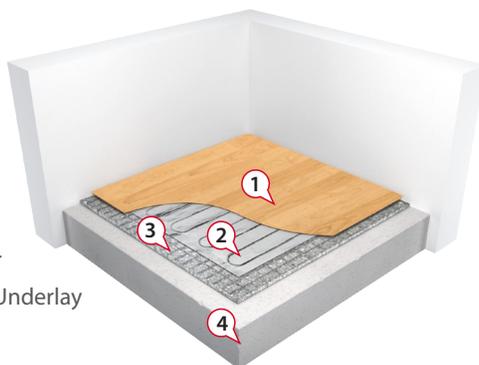

1. Wood/Laminate
2. Warmup Dual Overlay
3. Warmup Foil Heater
4. Subfloor

Vinyl/Carpet

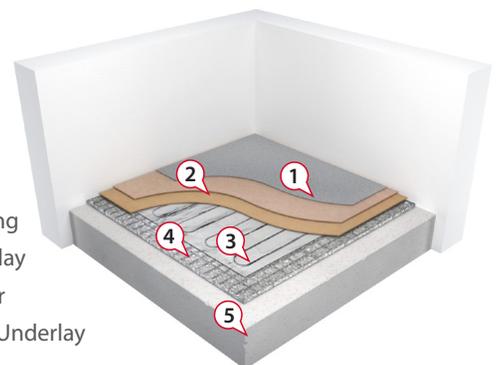

1. Vinyl/Carpet Flooring
2. Warmup Dual Overlay
3. Warmup Foil Heater
4. Warmup Insulated Underlay
5. Subfloor

Foil Heater WLFH



A streamlined electric radiant floor heating system designed for use with carpet, vinyl, laminate, engineered wood and other floating floors.

Dual Overlay WDO



A free-floating system designed for use over the Warmup® foil heating system. It provides a smooth and seamless subfloor making it suitable for soft and resilient floor coverings such as carpet, vinyl and linoleum.